


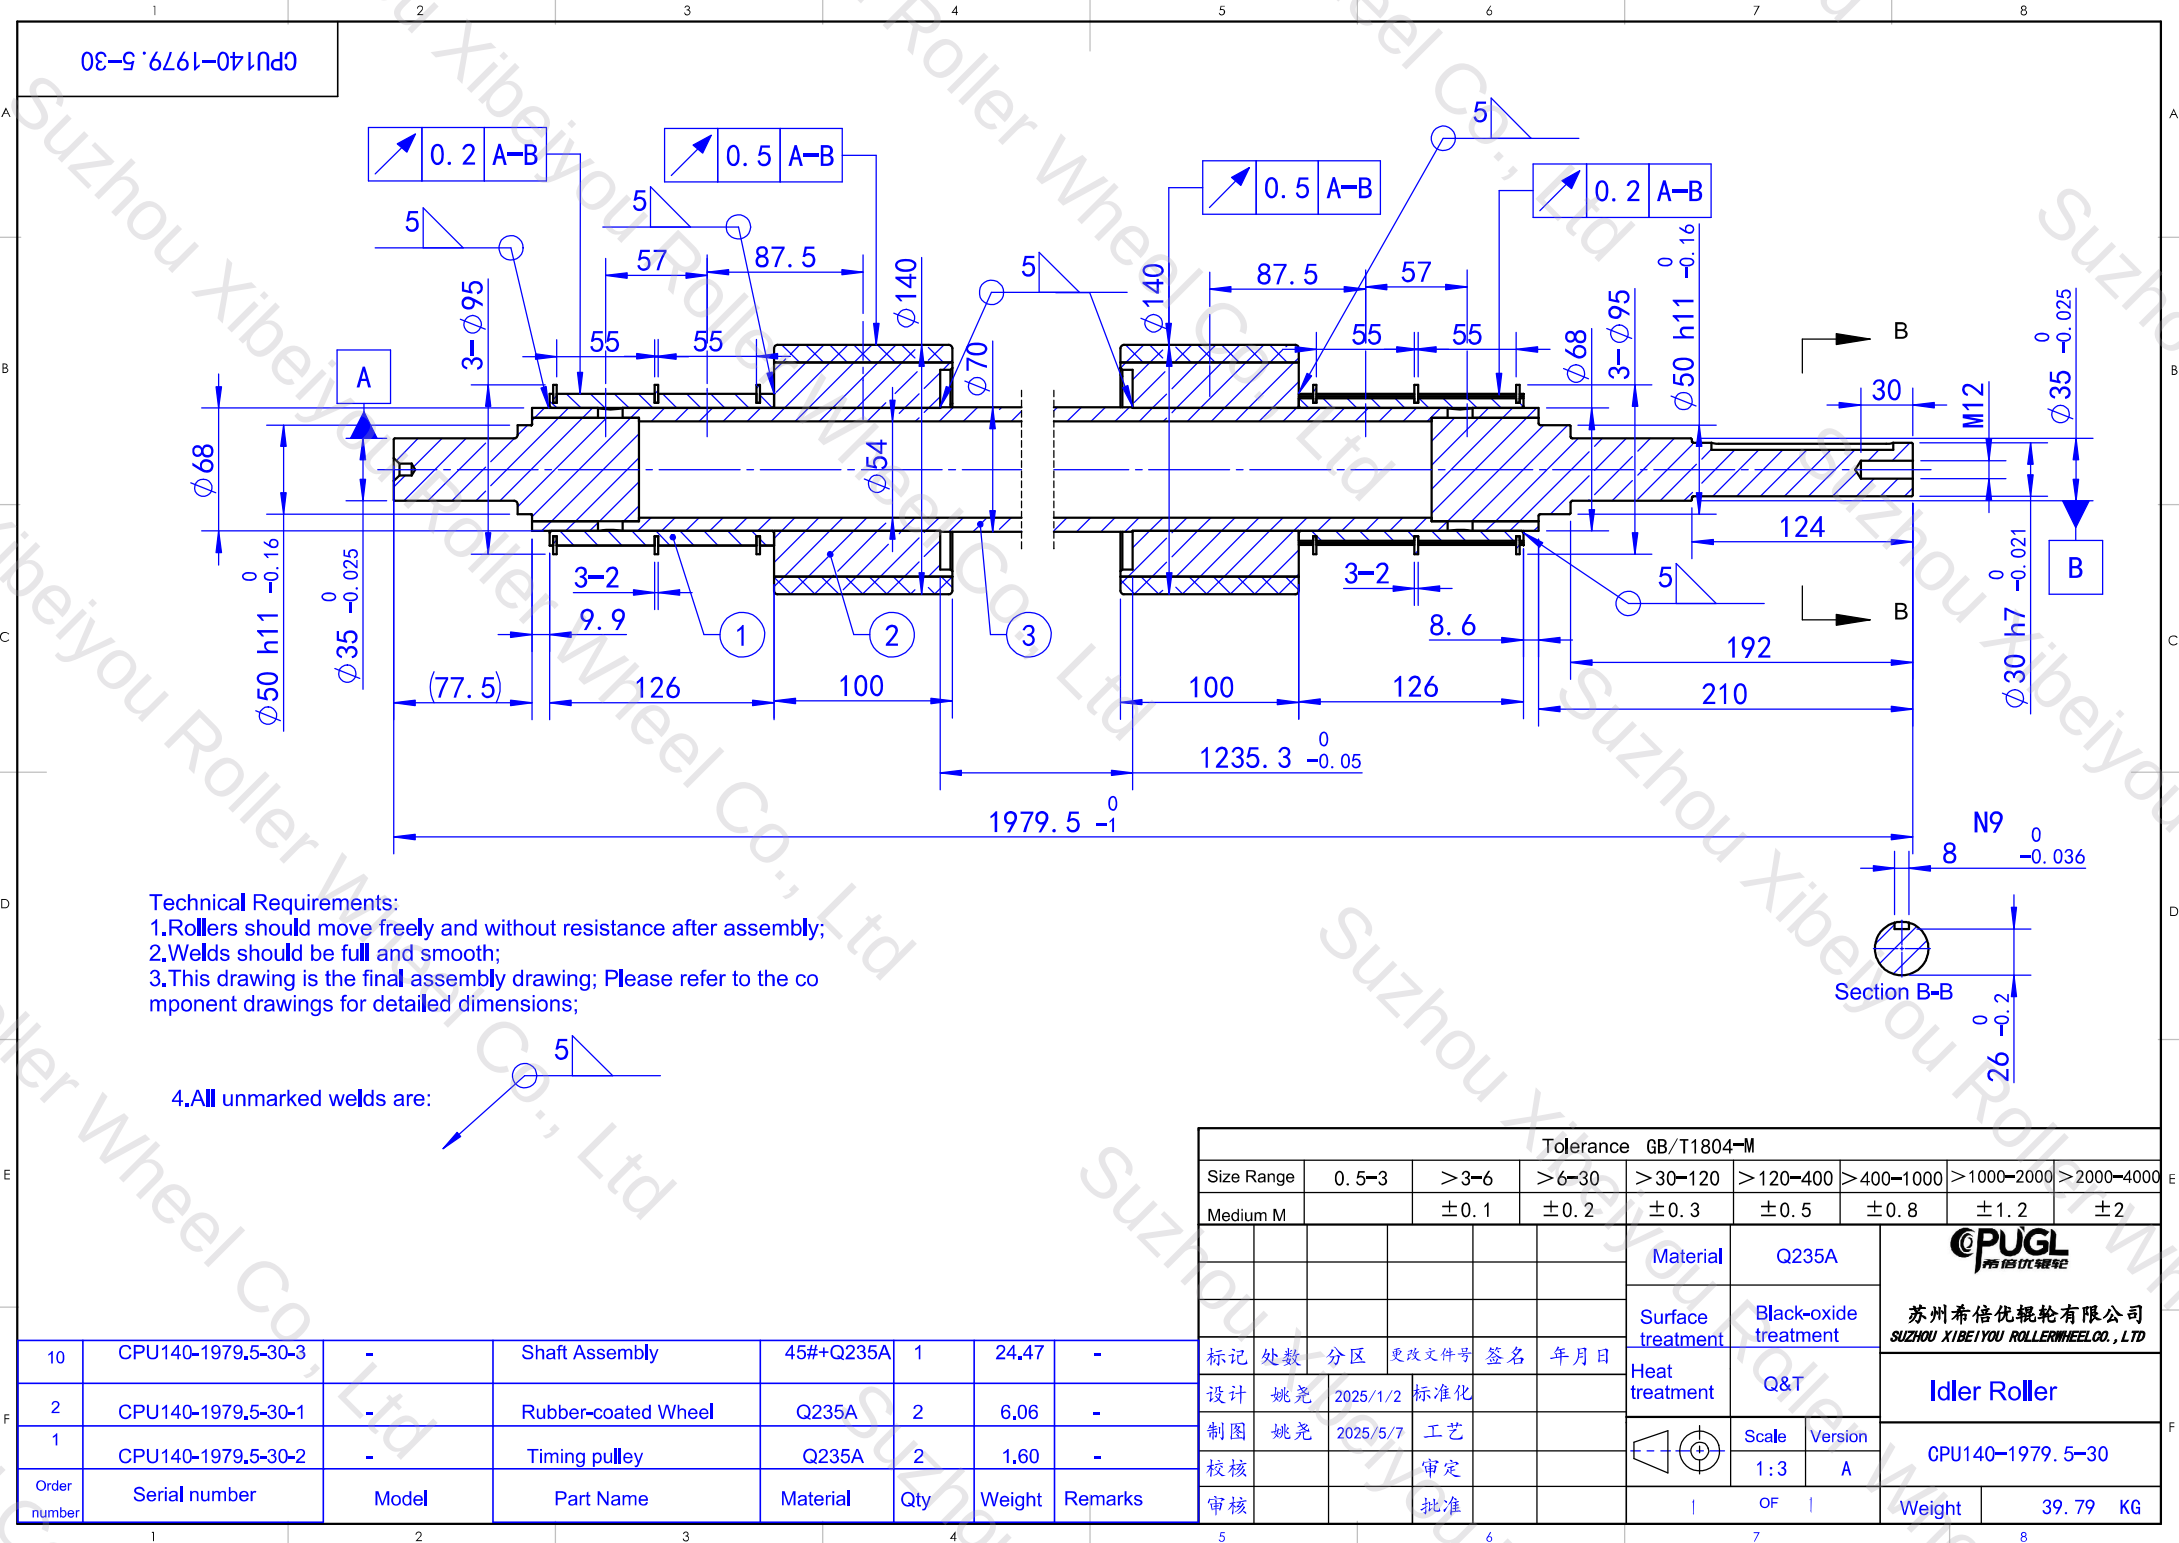

Tolerance GB/T1804-M									
Size Range		0.5-3	>3-6	>6-30	>30-120	>120-400	>400-1000	>1000-2000	>2000-4000
Medium M			±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	±2
					Material	Q235A	 苏州希倍优辊轮有限公司 SUZHOU XIBEIYOU ROLLERWHEEL CO., LTD		
					Surface treatment	Black-oxide treatment			
					Heat treatment	Q&T			
标记	处数	分区	更改文件号	签名	年月日	 Scale 1:3 Version A		Idle Roller	
设计	姚尧	2025/1/2	标准化					GPU140-1979.5-30	
制图	姚尧	2025/5/7	工艺			Weight 39.79 KG			
校核			审定						
审核			批准						

10	CPU140-1979.5-30-3	-	Shaft Assembly	45#+Q235A	1	24.47	-
2	CPU140-1979.5-30-1	-	Rubber-coated Wheel	Q235A	2	6.06	-
1	CPU140-1979.5-30-2	-	Timing pulley	Q235A	2	1.60	-
Order number	Serial number	Model	Part Name	Material	Qty	Weight	Remarks