
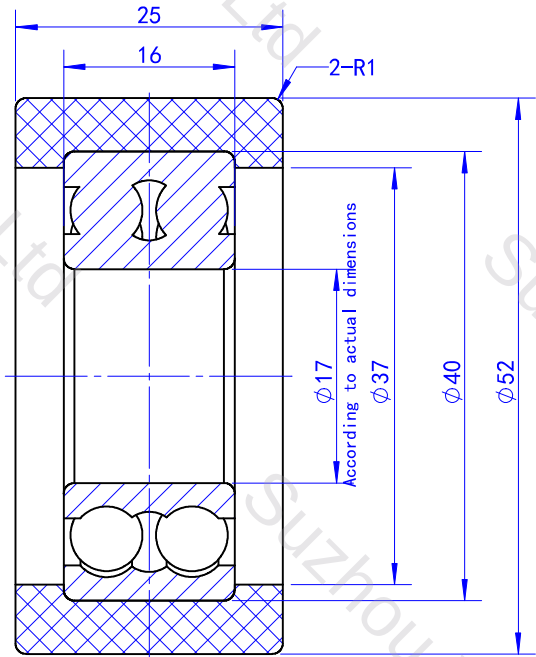


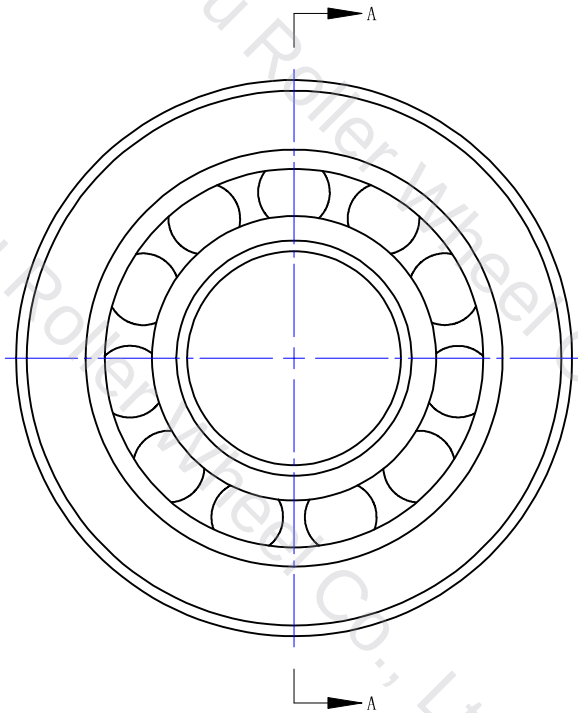

section A-A

Technical Requirements

- 1. Remove burrs and flash, break sharp edges;
- 2. Undefined geometric tolerances per GB/T 1184-H;
- 3. Undefined dimensional tolerances per GB/T 1804-M;
- 4. Undefined chamfer: C0.5, undefined radius: R0.5;
- 5. Undefined dimensions refer to the 3D model;
- 6. Bearing model: C&U 4203-2RS;
- 7. Polyurethane: MDI 95A, tan.

Dimensional tolerances GB/T1804-M									
尺寸分段	0.5-3	>3-6	>6-30	>30-120	>120-400	>400-1000	>1000-2000	>2000-4000	
中等 M	±0.1	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	±2	
									CPUGL 苏州希倍优辊轮有限公司 SUZHOU XIBEIYOU ROLLERWHEEL CO., LTD PU Coated Wheel With Axle CPUGL-ZC52-25-17
标记	处数	分区	更改文件号	签名	年月日	Material	No		
设计	郑航	2026/5/6	标准化			Surface Treatment	No		
制图	郑航	2026/5/6	工艺			Heat Treatment	No		
校核			审定				比例	版本	
审核			批准				1:1	A	
						共 1 张	第 1 张	总质量	0.00 KG